




USB Upgrade

Remark:

1. The U disk format supports FAT32, NTFS, exFAT and other formats. Please do not decompress and rename the delivered package to avoid being unable to upgrade.
2. Do not power off during the upgrade process, otherwise it is easy to cause the system to be unable to enter the system after booting.
3. If an old program (before V1.2.26), there will be a gray screen for about 1 minute when upgrade(the program is decompressed and loaded).
4. Add firmware upgrades for HDMI input.If your version is V1.2.47_3.68_2.13and before,please no connect any signal to the HDMI input port. After the software package upgrade is complete, the device will automatically restart and perform firmware upgrade for HDMI input. Waiting for a moment ,a message indicating that the upgrade is successful will pop up in the upper right corner, then need to restart the device manually.

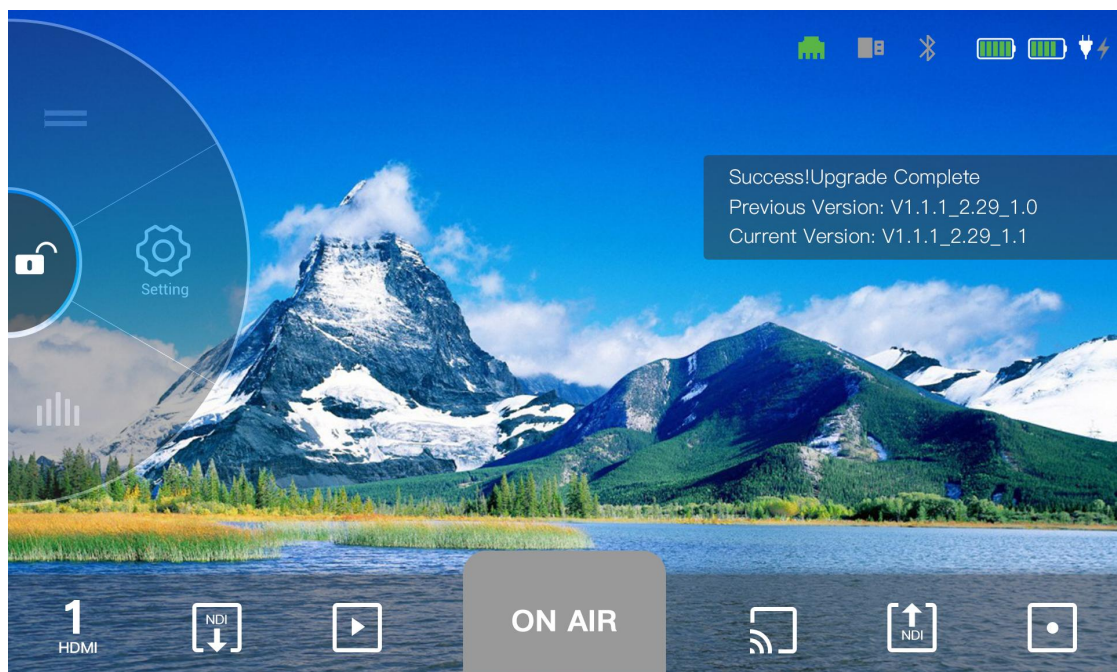

1. Support img format package upgrade. Copy the file to the root directory of the U disk (the img package will be upgraded synchronously)

TAO1PRO RELEASE V1.2.28 3.54 2.8 patch 202202081800.zip
TAO1PRO RELEASE V1.3.09 3.77 2.14 202204291545.img
TAO1PRO RELEASE V1.3.07 3.77 2.14 PATCH.zip


Note: After upgrading the img format package, the ZIP format package upgrade is no longer supported

2. Insert the U disk into the record USB port. Power on TAO 1pro.




3. Enter system setting and select the [Upgrade] option


3.1 Upgrade the V1.2.28 first. The new UI change a lot and need to upgrade it first then go on the new version.

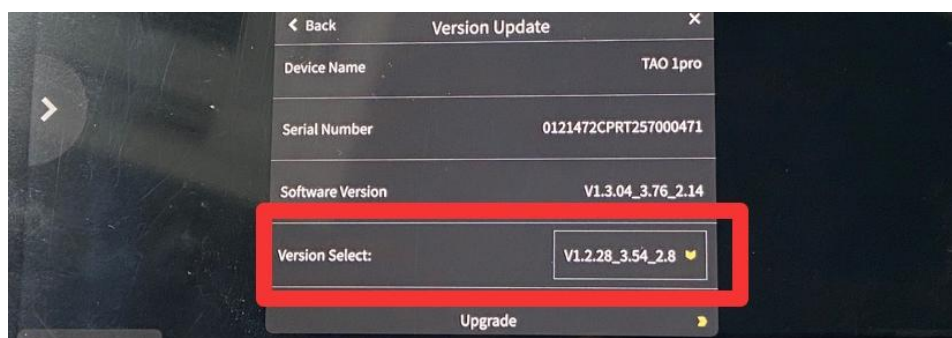

Then wait for a moment ,shows “In upgrading progress...” and the TAO 1pro will restart automatically.

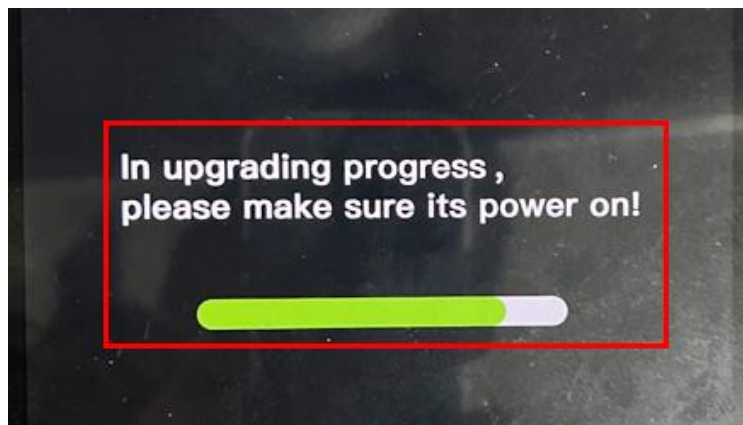

3.2 After finishing the V1.28 upgrade,then choose V1.3.07, and do the upgrade operation again.

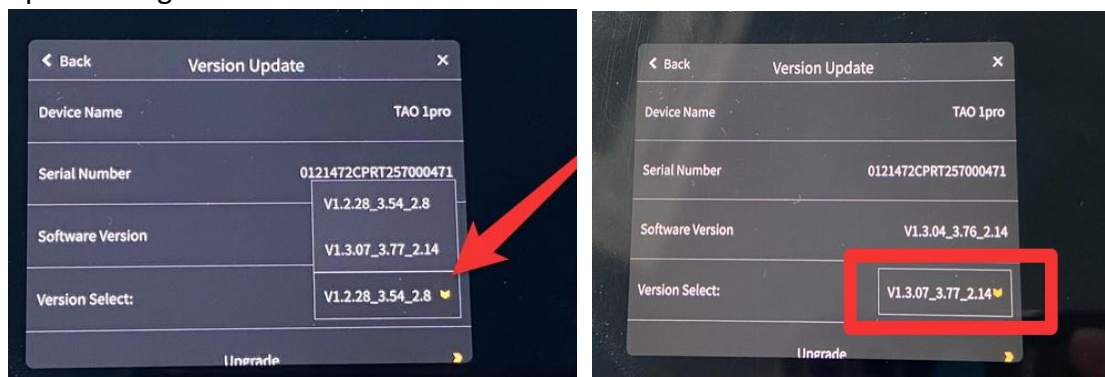

wait for about 5 minutes (do not power off during upgrade)

And the TAO 1pro will upgrade the img package synchronously,no need any other operation.

4. When the upgrade is done, check the version in the menu, if the version shows the same as the picture (V1.3.09_3.77_2.14)the upgrade is successful. If it is inconsistent with the displayed version, it means the upgrade failed, please try to upgrade again

