

MSP 405 Upgrade Guide

<u>CSD No:</u>					
<u>Product / Project:</u>		MSP 405 Upgrade Guide			
<u>Version</u>	<u>Date</u>	<u>ECO#</u>	<u>Description</u>	<u>Reporter</u>	<u>Responsible</u>
	2024.07.08	000#	Release	颜韦玲	

1. Overview of the upgrade program

- (1)**MSP405 program:** MSP405_Package_V1.08_20240723.bin
- (2)**Upgrade tool:** XTOOL, network cable

2. Upgrade operation guide

- (1)MSP405 program upgrade guide:

①**Upgrade program package:** MSP405_Package_V1.08_20240723.bin

②**Upgrade tool:** XTOOL, version V1.0.2.55;

Upgrade cable: Ethernet cable (applicable to the upgrade of existing programs);

Upgrade communication method: network communication;

Determine the MSP405 address: The default IP address of MSP405 is 192.168.0.199. If the IP address is not clear, press and hold the reset button next to the power port for 3 seconds to restore the default IP address 192.168.0.199;

--If you need to modify the IP address, you can enter 192.168.0.199 on the web page to enter the web menu, as shown in the figure below, modify the IP address as required, and click submit.



Set IP address


IP Address:

Mask Address:


Gate Address:

a. According to the current IP address of the MSP405 device (LAN port IP address), such as 192.168.0.199, please connect the network cable to the computer before upgrading, and then turn on the MSP405;

b. Open the XTOOL software, select Communication Settings->Network Communication->Enter the MSP405 IP address, such as 192.168.0.199, and the current device model and serial number can be identified in the lower right corner of the software, as shown below:

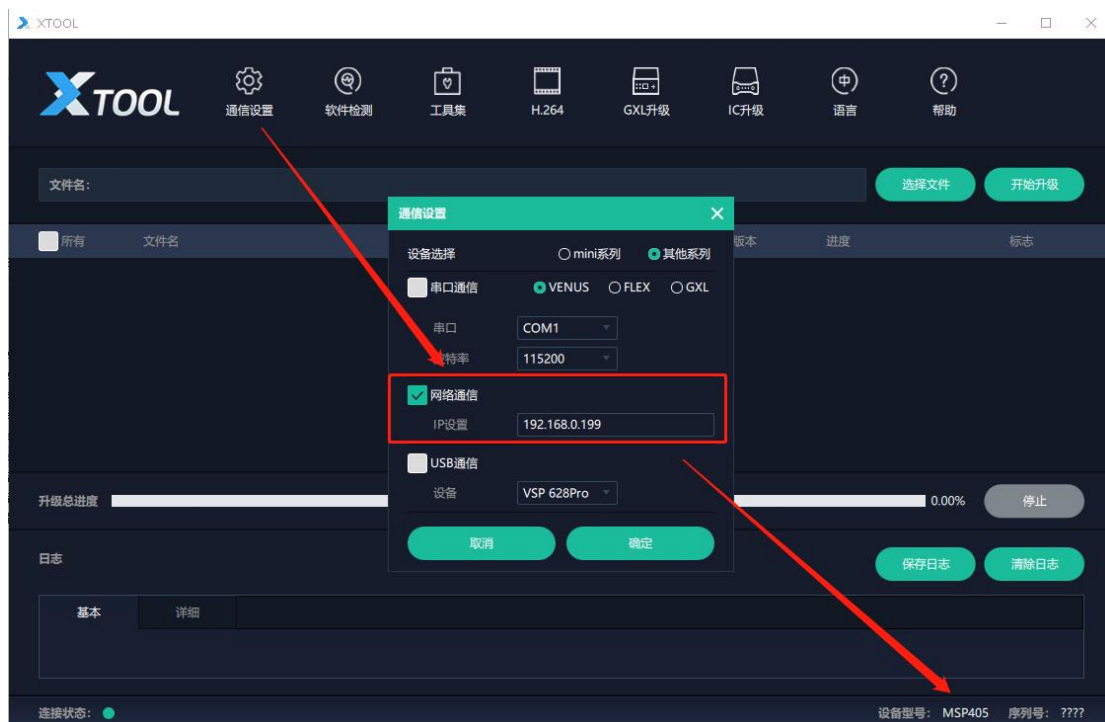

c. Load the program: MSP405_Package_V1.07_007_20240708.bin, select the sub-program package to be upgraded, and start the upgrade.

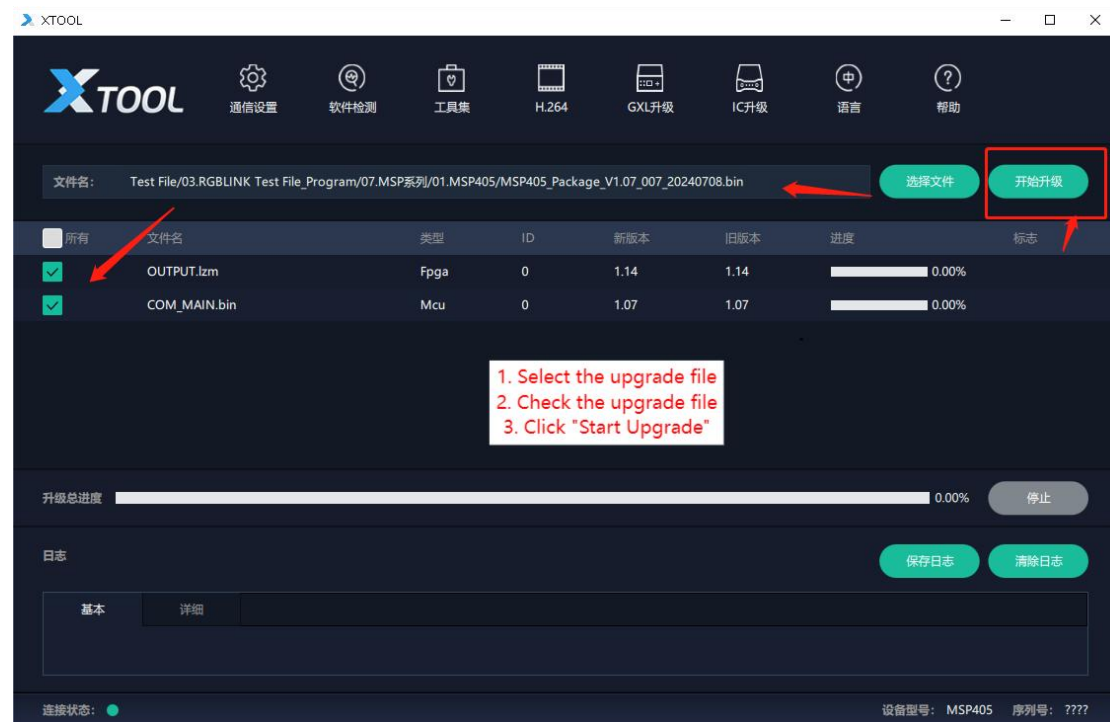

d. Wait for the upgrade to complete. The upgrade time is about 3 minutes. After the upgrade is complete, restart the MSP405.